


Single Axis Actuator LX26

Motor Adapter Plates / Motor Adapter Centering Tools



Note: *Marked area indicates where the Motor Adapter protrudes beyond the Rail. Special attention must be given.

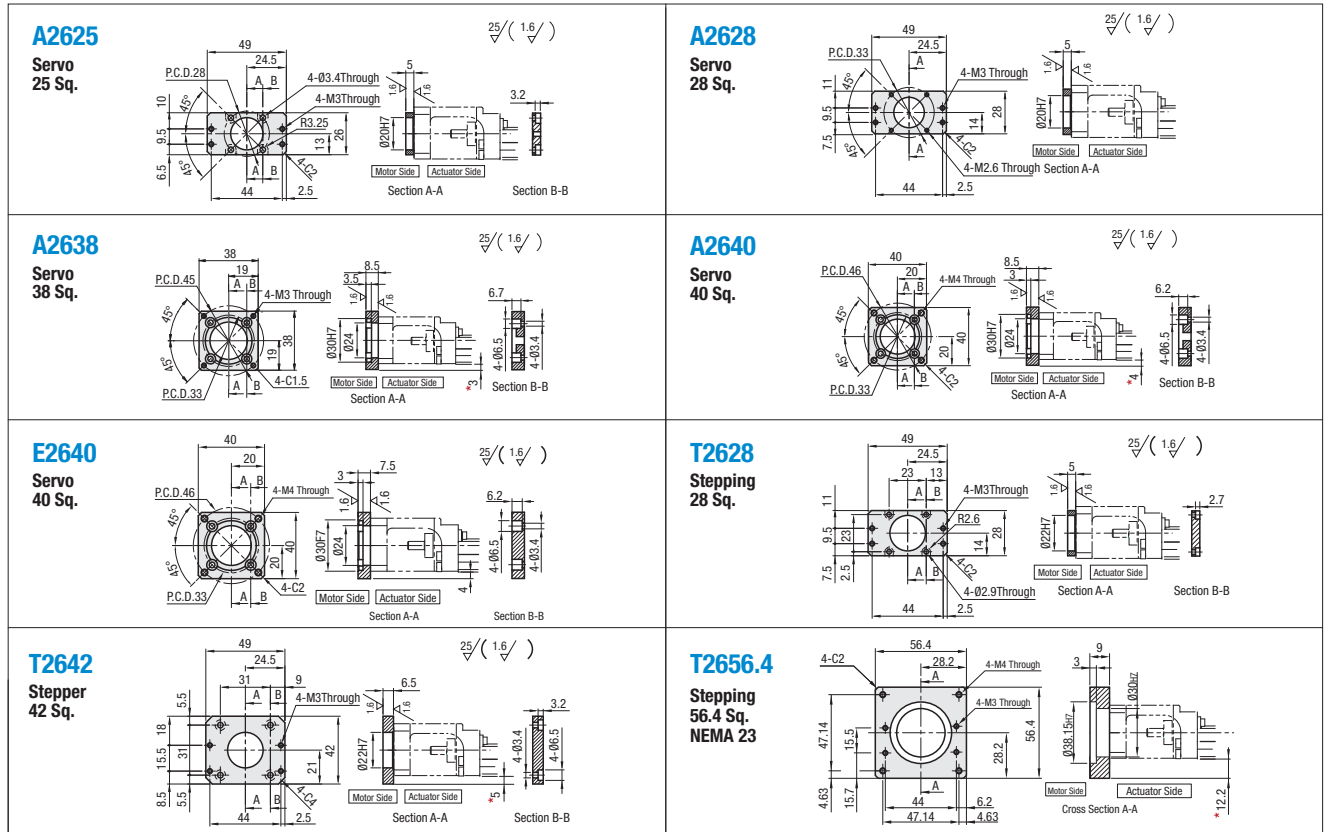

Stepping Motor Application Table

Part Number	Flange Size	Manufacturer	Motor Part Number	Type	Recommended Coupling
T2628	28 Sq.	Oriental Motor	CSK22	2-Phase	SCXW21 (P.1094)
			C W1-8 Tool Steel ²	5-Phase	
			ASC3*		
			AR2 (ARM)	α Step	
T2642	42 Sq.		PK24*	2-Phase	SCPW21 (P.1094)
			CSK24		
			RK54	5-Phase	CPDW19 (P.1096)
			RKS54* / PK54*		
			AS46, ASC46, AR46		
T2656.4	5.64 Sq.	NEMA Standards	NEMA23	—	CPDW19 (P.1096)

² NEMA Standards is a set of standards stipulated by National Electrical Manufacturers Association of United States.

Servo Motor Application Table

Part Number	Flange Size	Manufacturer	Product Number	Wattage	Recommended Coupling
A2625	25 Sq.	Yasukawa Electric Corporation	SGMMJ-A1	10W	SCXW21 (P.1094) SCPW21 (P.1094) CPDW19 (P.1096)
			SGMMJ-A2	20W	
			SGMMJ-A3	30W	
A2628	28 Sq.	Mitsubishi Electric Corporation	HG-AK0136	10W	
			HG-AK0236	20W	
			HG-AK0336	30W	
A2638	38 Sq.	Panasonic	MSMD5A		
			MSME5A	50W	
			MSMD01*		
			MSME01*	100W	
			MSME01*		
A2640	40 Sq.	Yasukawa Electric Corporation	SGMJV-A5		
			SGMAH-A5		
			SGMAS-A5		
		Mitsubishi Electric Corporation	HG-MR053	50W	
			HG-KR053		
			HF-KP053		
		Sanyo Denki Co., Ltd.	Q1AA04003D	30W	
			Q1AA04005D		
		Omron Corporation	R88M-K05030	50W	
E2640	40 Sq.	Keyence Corporation	MV-M05		CPDW19 (P.1096)
			SV-M005		
		SIEMENS	1FK7011-5		
			1FK7015-5	100W	

² Shaft insertion depth on coupling will be 0.5mm shorter on each side when used with Siemens motor.

³ Product numbers and specifications of motors are subject to change.

Please check the manufacture's information.

⁴ Applicable motors and couplings are not limited to the above listed products.

Please confirm each mounting dimension.

Motor Adapter Centering Tools

JIGLX26

Material: 5056 Aluminum Alloy
Surface Treatment: White Anodize

Application Example

Motor Mounting Example

Secure included Motor Adapter to the Motor
¹ Motor, coupling and motor mounting screws are not included.

Part Number	D	Corresponding Attachments	d	D ₁	d ₁	L	T	ℓ
JIGLX26	20	A2628	8	15	5	47.5	17	12
	30	A2638/A2640	8	15	5	49.5	13	11

Part Number Example	Part Number	D
JIGLX26	-	20